


SiteMat

SiteMat offers a cost-effective solution for anti-slip protection. This versatile, durable, and lightweight walkway surface provides exceptional non-directional grip, due to its diamond-embossed chequer plate pattern. Its eye-catching bright yellow colour also ensures high visibility in areas where safety is paramount, making it an ideal choice for construction sites, industrial settings, and other high-traffic environments. Available in both 5m and 10m rolls.

Features

- ◆ **Typical applications:** Ideal for enhancing safety and visibility in construction site walkways and other high-traffic areas.
- ◆ **Material:** 100% PVC.
- ◆ **Cleaning:** Wash with cold water. Can use a pressure pump to remove dirt.
- ◆ **Sustainability:** Nature friendly, biodegradable and recyclable. REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- ◆ **Warranty:** Lifetime.

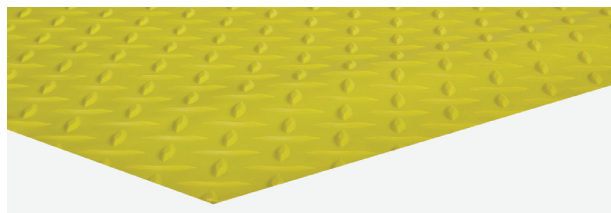

Suitable for
indoor and outdoor use



For more information about this product or, to place an order [click here](#)

Code	Metric	Imperial	Thickness	Weight	Type	Colour
CR2100-1YL-5	100cm x 5m	4' x 16'	2mm	17.5kg	Roll	Yellow
CR2100-1YL	100cm x 10m	4' x 33'	2mm	35kg	Roll	Yellow

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Our delivery promise

We guarantee your order will be shipped on time, every time.
That's the Blue Diamond difference.

V4.04.25

Get in touch

+44 (0) 1779 841 899
sales@bluediamond.uk.com
www.bluediamond.uk.com

SiteMat

Technical Specification

Slip resistant: Excellent slip resistance to level 3

Wear resistant: Excellent wear resistance to level 3, suitable for heavy footfall

Water absorbent: Great water absorbency to level 2

Crush resistant: Great crush resistance to level 2

Disability friendly: Yes, the low profile makes it suitable for wheelchair users

Dry area: Yes

Wet area: Yes

Wheeled area: Yes, the low profile allows easy access for lightweight wheeled traffic

Environment: Suitable for indoor and outdoor use

Impact resistant: Yes

Product testing:

- ◆ Hardness: 85+/-5 shore A - DIN ISO 7619-1
- ◆ Volume weight: 1.82g/cm³ - DIN 53504
- ◆ Tensile strength: Direction 1 - 1690psi, Direction 2 - 1940psi - ASTM D412-16
- ◆ Elongation at break: 190% - ASTM D3574-17 Test E
- ◆ Puncture resistance: EN388:2016+A1:2028, Clause 6.5
- ◆ Indentation resistance: ASTM F970-17
- ◆ Fire classification: GB 8624-2012, Class B-s1

Sustainability:

- ◆ Nature friendly, biodegradable and recyclable
- ◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
- ◆ Contributes to a cleaner environment by reducing the need to use cleaning chemicals

Temperature resistance: -10°C to +65°C